

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Саранск (8342)22-96-24
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97

Тверь (4822)63-31-35
Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47


www.jsr.nt-rt.ru | | jou@nt-rt.ru

Технические характеристики на сухие тепловые стерилизаторы JSOF, JSON аксессуары (перфорированные полки) КОМПАНИИ JSR

JSOF-030S / 050S JSON-030S / 050S DRY HEAT STERILIZER

amb. +10 °C ~ 250 °C

Dry Heat Sterilizer is a common instrument to be used to drying, heating and sterilizing objects by heating air up to +160 °C or +180 °C with forced convection or gravity convection system during specified sterilizing exposure time range from 30 to 60 minutes.

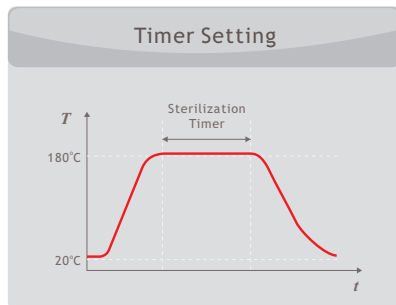

Features

Performance

Temperature Range : amb. +10 °C to 250 °C

Temperature Accuracy : within +/- 0.2 °C

Temperature Uniformity : within +/- 1.0 °C

Choice of forced convection or gravity convection.

JSOF-030S/050S Forced Air Convection

JSON-030S/050S Gravity Air Convection

50mm thick high thermal efficiency mineral wool with woven aluminum barrier sheet saves energy and less dust.

Construction

Durable epoxy powder coated metallic casing.

Ventilation damper.

Corrosion resistant Stainless Steel 304 chamber with seamless round cornered edge allows easy cleaning and prevents leakage.

Convenience

Stainless Steel 304 Chamber with seamless round cornered edge allows easy cleaning.

Removable and adjustable shelf by 25mm spacing.

Easy-to-open and air-tight one touch door latch.

Opening size adjustable ventilation damper.

Door switch cut-off heater and blower to protect user from exposure to hot air.

Safety

DOOR SENSOR CUT OFF HEATER AND FAN

DUAL OVER TEMPERATURE CUT-OFF BY CONTROLLER AND INDEPENDENT THERMOSTAT

HIGH TEMPERATURE CUT-OFF AND AUDIO VISUAL ALARM

LOW TEMPERATURE CUT-OFF AND AUDIO VISUAL ALARM

PT SENSOR SHORT OR DISCONNECTION AUDIO VISUAL ALARM

OVER CURRENT CUT-OFF : Electrical Leakage Breaker



Specifications

Model	JSOF-030S	JSOF-050S	JSON-030S	JSON-050S
	Forced Convection		Gravity Convection	
Dimension Data				
Chamber Volume	33 Liters	48 Liters	33 Liters	48 Liters
Inner Dims. (WxDxH) mm	350 x 270 x 350	400 x 300 x 400	350 x 270 x 350	400 x 300 x 400
Outer Dims. (WxDxH) mm	510 x 570 x 660	560 x 585 x 710	510 x 490 x 660	560 x 505 x 710
Window Dims. (WxH) mm	n/a	n/a	n/a	n/a
No. of Shelf Positions	10 ea	12 ea	10 ea	12 ea
No. of Shelf Included	2 ea	2 ea	2 ea	2 ea
No. of Ventilation Damper	1 ea	1 ea	1 ea	1 ea
Performance Data				
Heating System	Forced Convection		Gravity Convection	
Temperature Range	ambient +10 °C to 250 °C, 0.1 °C resolution			
Temperature Accuracy at 120 °C	+/- 0.2 °C	+/- 0.2 °C	+/- 0.3 °C	+/- 0.3 °C
Temperature Uniformity at 120 °C	+/- 1.0 °C	+/- 1.0 °C	+/- 2.0 °C	+/- 2.0 °C
Heat-up Time to 120 °C	15 min.	15 min.	15 min.	15 min.
Controller				
Type	Digital Microprocessor PID Temp. Controller			
Display	4 Digit LED Display			
Control Logic	PID Temperature Control with Auto-Tuning			
Calibration	1 Point Temperature Offset			
Auto-Start Timer	99 min 59 sec / 99 hr 59 mi n / 99 day 23 hr			
Auto-Stop Timer	99 min 59 sec / 99 hr 59 mi n / 99 day 23 hr			
Sensor	Class A Pt-100 Ohm Sensor			
Power Restoration	Power and Timer Restoration Function in case of power outage			
Communication Interface	n/a			
Material Data				
Body	Epoxy Powder Coated Steel			
Chamber	Stainlss Steel 304 (AISI304)			
Insulaton	50 mm Woven Mineral Wool with Aluminum Barrier			
Safety Data				
Safety Device	Door Open / Over Temperature / Over Current Protection Audio Visual Alarm			
Electrical Data				
Power Requirement	220 +/- 10% VAC 50/60 Hz 1 Phase			
Power Consumption	800 W 3.8 amp	1.0 kW 4.7 amp	800 W 3.8 amp	1.2 kW 5.5 amp
Plug Configuration	CEE 7/7 Schuko or BS 1363			
Usable Condition				
Temp. & Humidity	5 °C - 40 °C, 80% RH Max.			

J5OF-030S / 050S J5ON-030S / 050S

DRY HEAT STERILIZER

amb. +10 °C ~ 250 °C

Ordering Information

Art. Number	Descriptions
J5OF-030S	Forced Convection Dry Heat Sterilizer 33 Liter 220 VAC 1 ph 50/60Hz
J5OF-050S	Forced Convection Dry Heat Sterilizer 48 Liter 220 VAC 1 ph 50/60Hz
J5ON-030S	Gravity Convection Dry Heat Sterilizer 33 Liter 220 VAC 1 ph 50/60Hz
J5ON-050S	Gravity Convection Dry Heat Sterilizer 48 Liter 220 VAC 1 ph 50/60Hz

Accessories	Shelves
P5S-A02	Perforated Shelf, Stainless Steel 304 for J5OF-030S J5ON-030S W320 x D250 mm
P5S-A03	Perforated Shelf, Stainless Steel 304 for J5OF-050S J5ON-050S W370 x D280 mm
P5S-B02	Wire Shelf, Stainless Steel 304 for J5OF-030S J5ON-030S W320 x D250 mm
P5S-B03	Wire Shelf, Stainless Steel 304 for J5OF-050S J5ON-050S W370 x D280 mm
P5S-A99	Shelf Support, Set of 4 ea

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Саранск (8342)22-96-24
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97

Тверь (4822)63-31-35
Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47